



ISO 9001-2015

Indian Society for



Non-Destructive Testing

Life member of ISNT



LED BRIGHTNESS
ADJUSTMENT



AUDIO
RECORDING



RECHARGEABLE
LI-BATTERY



JPG FORMAT:
640 x 480 PIXEL



COMPLIANT WITH
MPEG4



NTSC / PAL



MIRROR VIEW



IP57



UP TO 32G



5hrs
ENERGY SAVING

A Range of High
Performance, Reliable and
Easy-to-Use Instruments
7" TFT LCD Monitor
800*480 Pixels

NEW



Feature Function

- Superior image quality
- 7" TFT LCD
- 1m drop resistance
- Rechargeable battery with 5 hours capacity
- 5X Zoom: 1.5X, 2.0X & 5.0X digital zoom
- Neck/Hand strap: convenience and great for operation
- Light weight only 1.3kg (main system)
- Drop & Water proof : IP57 resistant
- Storage : SD card(SDHC), up to 32G
- Video / Photo file Format : .avi / .jpg
- Mirror Image
- Screen Image Rotation Ability
- Video Output
- USB Connection

For industries that depend on critical visual inspections, the experts now have a better choice of video Borescope उन उद्योगों के लिए जो महत्वपूर्ण दृश्य निरीक्षण पर निर्भर करते हैं, विशेषज्ञों के पास अब वीडियो बोरस्कोप का बेहतर विकल्प है



By using this product, it is easily for you to inspect the area higher or lower than you by probe.

Specifications

Holder Dimension 120mm*40mm*40mm
Length 540mm / 990mm
Weight 220g

2 WAY ARTICULATION

2 way articulation probe helping to check angles that hardly can be checked easily (over 270° of view).

Step 1
By using the probe to penetrate the holding side from bottom to top.

Step 2
Press the grip button to stable the probe.

Step 3
By holding the button down and twist the red device to make it hold.

Left / Right 135°



LCD	7" LCD (800 x 480)
Snapshot	640 * 480 , JPEG
Recording	640 * 480 , MPEG4 (with audio)
Storage	4GB SD card (up to 32GB)
USB	Live view mode (optional software) / Mass storage mode
AV output	NTSC/PAL
Audio input / output	Built-in microphone / Headphone Jack
Brightness Adjust	10 levels
Dust & Water Proof	IP57 standard
Shock Proof	1 meter drop test
Working temperature	-10 ~ 60°C
Storage temperature	-20 ~ 80°C
Battery	Built-in Li-polymer Battery, Capacity: 6 hrs, Charge time: 3 hrs
Dimension	240 * 154 * 47mm
Weight	1.18 kg (2.6 lb)
Languages	27 Languages: English / French / German / Italian / Spanish / Portuguese / Japanese / Traditional Chinese / Simplified Chinese / Danish / Dutch / Polish / Russian / Bulgarian / Turkish / Swedish / Finnish / Norwegian / Estonian / Lithuanian / Latvian / Hungarian / Czech / Slovak / Slovenian / Romanian / Greek

2 Way Articulation VGA Probe

Model	JEJKVS-60012	JEJKVS-60022	JEJKVS-60032
2 Way Articulation		Left: 155° / Right: 155°	
Articulation Radius		50mm +/- 5mm	
Camera Head Length		23.3mm	
Camera Head Material		Stainless steel	
Tube Length	1m	2m	3m
Tube Diameter		Φ6mm	
Tube Material		Soft-metal	Soft-metal (flexible material)
Sensor Resolution		VGA (640 x 480)	
LED		Forward: 224mcd * 3 LED / Side: 224mcd * 2 LED	
Brightness		Adjustable by Handle	
D.O.F.		1~10cm	
F.O.V.		87.1 degree (Diagonal)	
Working Temperature		-20°C~65°C	
Waterproof		IP67	
Handle Dimension		139.3 * 34.9 * 31.8mm	
Handle Weight		220g	
Battery		Rechargeable Li-Polymer Battery 3.7V	

VGA PROBE SERIES

VGA, Function Upgraded Probe for option **NEW!**

640x480 (Dynamic), Particle-free, Anti-reflection, Brighter Image, Rotatable Image



VGA 5.5mm

VGA 6mm, 2 way Articulation


NEW 360° Articulation Probe

360° articulation provide flexibilities in narrow space inspection. High density stainless steel braided tube provide durability, flexibility and also rusty, water and temperature resistant.

- Fast and easy joystick operation
Provide snapshot/freeze image, light+(boost) and light- functions on the controller.
- Stainless Steel Braided tube
Durable, rusty and temperature resistant
- Full ways articulation
Provide flexibilities in narrow space inspection



Climbing Balls

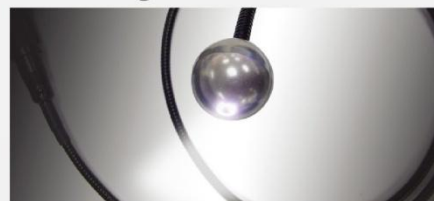

- 8.5mm/5.5mm
- Overcome the height difference


8.5mm	JCB-8515 (Outer diameter 15mm)
5.5mm	JCB-5515 (Outer diameter 15mm) JCB-5525 (Outer diameter 25mm)



For overcoming or pass the sharp angle in the pipe.

Switch Probe

Switch probe, including dual camera lens with LED sets in one probe and effective solution for forward-view and side-view switching. You don't need the mirror set to be the 90 degree side view. Just clicking the button to change forward-view and 90 degree side-view quickly and easily. It is high technical tool with cost-effective solution for your inspection.



The equipment is warranted against defective materials and manufacturing defects only. No warranty of Accessories (Probes, camera) & Spare, 12 Months Warranty only on display Unit